12.0 x 4.0 x 1.6 (mm) ISM 915 MHz Chip Antenna (C912D5)

Engineering Specification

1. **Product Number**

Н 2 U 6 K 2 C0 0



2. **Features**

- *Stable and reliable in performances
- *Low profile, compact size
- *RoHS compliance
- *SMT processes compatible

3. **Applications**

- *ISM 915 MHz Band applications
- *IoT applications
- *IEEE 802.11ah/ Wi-Fi Certified HaLow technology

4. **Description**

Unictron's C912D5 chip antenna is designed for ISM 915 MHz band applications, covering frequencies 902~928 MHz. Fabricated with proprietary design and processes, C912D5 shows excellent performance and is fully compatible with SMT processes which can decrease the assembly cost and improve device's quality and consistency. Technologies Corp

2019-04-18



詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT **PERMISSION**

Prepared by : Mina Designed by: Peter Checked by : Mike Approved by : Herbert


TITLE: 12.0 x 4.0 x 1.6 (mm) ISM 915 MHz Chip Antenna **DOCUMENT** REV. H2U66J1K2C0100 (C912D5) Engineering Specification NO. D

5. Layout Guide & Electrical Specifications

5-1. Layout Guide (unit: mm)

Solder Land Pattern:

The solder land pattern (gray marking areas) is shown below. Recommendation on matching circuit will be provided according to customer's installation conditions.

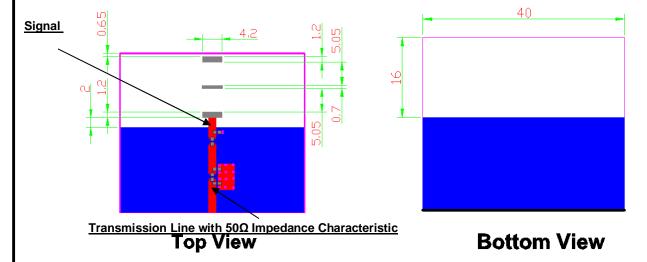

5-2. Electrical Specifications (Evaluation Board Dimensions: 80 x 40 mm²) 5-2-1. Electrical Table

Characteristics	Specifications	Unit
Outline Dimensions	12.0 x 4.0 x 1.6	mm
Ground Plane Dimensions	64 x 40	mm
Working Frequency	902 ~ 928	MHz
VSWR (@ center frequency)*	2 Max.	
Characteristic Impedance	50	Ω
Polarization	Linear Polarization	
Peak Gain (@ 915 MHz)	-0.98 (typical)**	dBi
Efficiency (@ 913 Wi12)	32.9 (typical)**	%

^{*}Center frequency means the frequency with the lowest value in return loss of the chip antenna on the evaluation board.

Unictron
Technologies Corp.

2019-04-18

Document

Unictron
Technologies Corp.

詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Mina Designed by : Peter Checked by : Mike Approved by : Herbert


TITLE: 12.0 x 4.0 x 1.6 (mm) ISM 915 MHz Chip Antenna (C912D5) Engineering Specification

DOCUMENT NO.


H2U66J1K2C0100

D

^{**}A typical value is for reference only, not guaranteed.

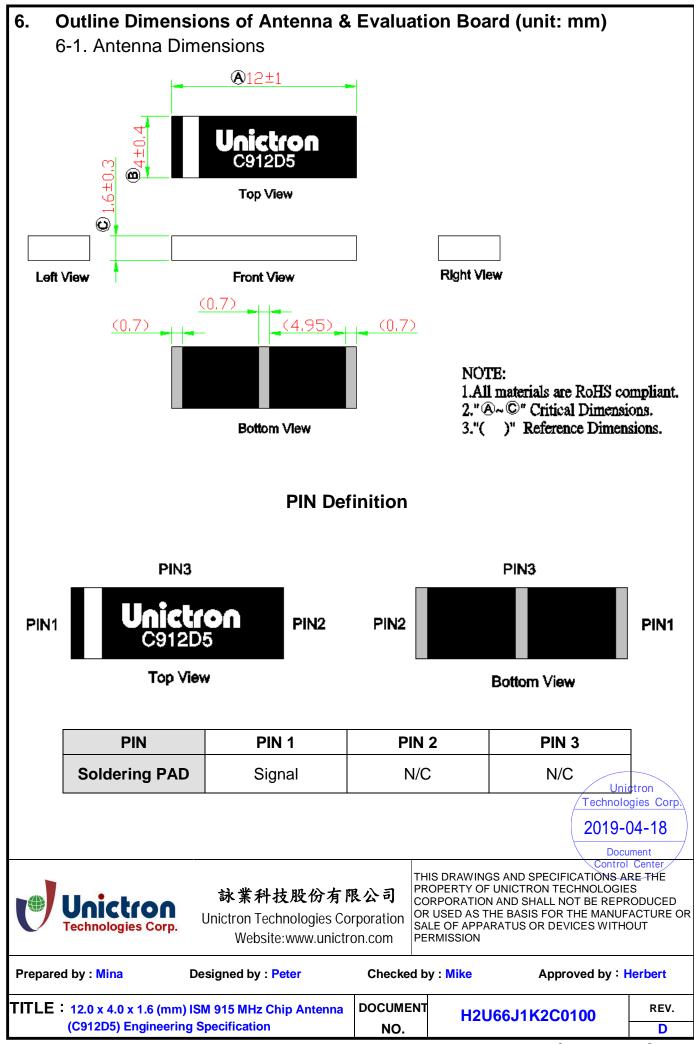

6-2. Evaluation Board with Antenna

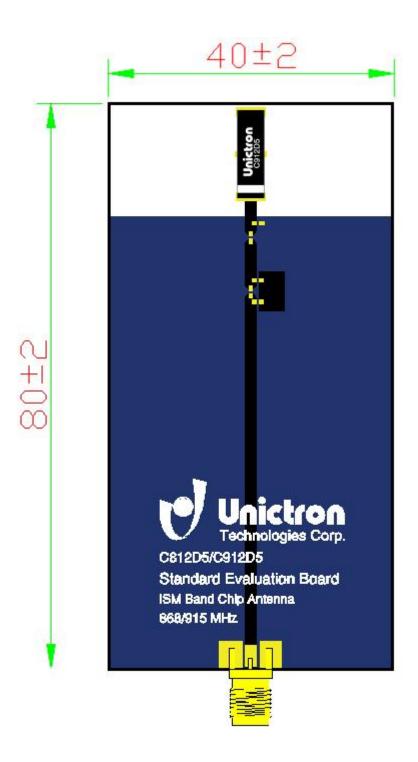

unit: mm_{Unictron}
Technologies Corp.

2019-04-18

Document



詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Mina Designed by : Peter Checked by : Mike Approved by : Herbert


TITLE: 12.0 x 4.0 x 1.6 (mm) ISM 915 MHz Chip Antenna (C912D5) Engineering Specification


DOCUMENT NO.


H2U66J1K2C0100


7. Radiation Pattern (with 80 x 40 mm² Evaluation Board)

7-1. 3D Radiation Gain Pattern @ 915 MHz (unit: dBi)









2019-04-18

Document Control Cente



詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


Prepared by: Mina Designed by: Peter Checked by: Mike Approved by: Herbert

TITLE: 12.0 x 4.0 x 1.6 (mm) ISM 915 MHz Chip Antenna (C912D5) Engineering Specification

DOCUMENT NO.


H2U66J1K2C0100

7-2. 3D Efficiency Table

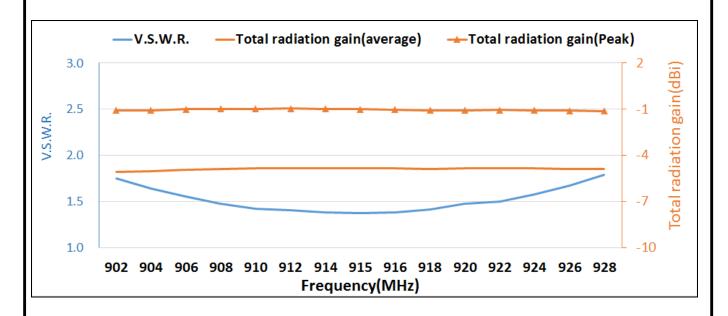

8. Frequency tuning and Matching circuit

8-1. Chip antenna tuning scenario:

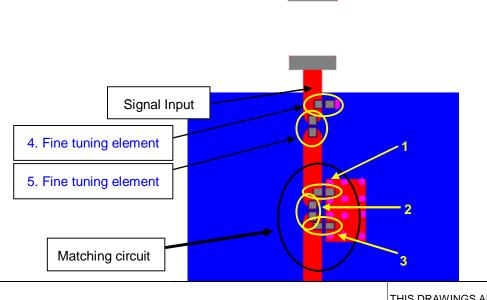

Unictron
Technologies Corp.

2019-04-18

Document



詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Mina Designed by : Peter Checked by : Mike Approved by : Herbert


TITLE: 12.0 x 4.0 x 1.6 (mm) ISM 915 MHz Chip Antenna (C912D5) Engineering Specification

DOCUMENT NO.

H2U66J1K2C0100

8-2. Matching circuit:


With the following recommended values of matching and tuning components, the center frequencies will be about 915 MHz at our standard 80 x 40 mm² evaluation board. However, these are typical reference values which may need to be changed when circuit boards or part vendors are different.



System Matching Circuit Component				
Location	Description	Vendor	Tolerance	
1	6.8nH, (0402)	MURATA	±3%	
2	1.5nH, (0402)	MURATA	±0.1nH	
3	N/A	-	-	
4 Fine tuning element	0.4pF, (0402)	MURATA	±0.05pF	
5 Fine tuning element	10nH, (0402)	MURATA	±5%	

9. Soldering Conditions

Typical Soldering Profile for Lead-free Process

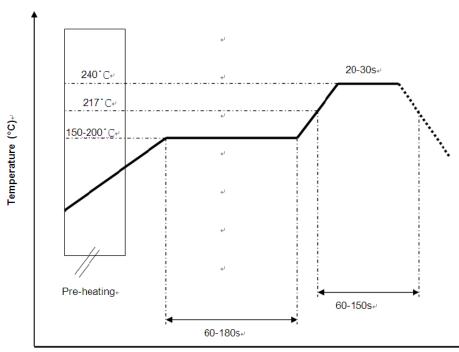

Unictron
Time (s.) Jechnologies Corp

2019-04-18

*Recommended solder paste alloy: SAC305 (Sn96.5 /Ag3 /Cu0.5) Lead Free solder paste.

Document



詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by: Mina Designed by: Peter Checked by: Mike Approved by: Herbert

TITLE: 12.0 x 4.0 x 1.6 (mm) ISM 915 MHz Chip Antenna (C912D5) Engineering Specification


DOCUMENT NO.

H2U66J1K2C0100

10. Packing

- (1) Quantity/Reel: 3500 pcs/Reel
- (2) Plastic tape: Black Conductive Polystyrene.

a. Tape Drawing

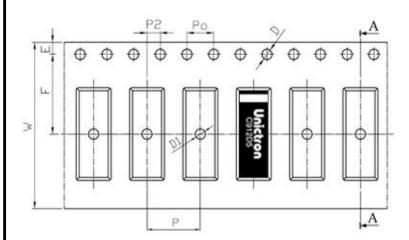

b. Tape Dimensions (unit: mm)

	0	T.1
Feature	Specification	Tolerance
	s	S
W	24.00	±0.30
Р	8.00	±0.10
Е	1.75	±0.10
F	11.50	±0.10
P2	2.00	±0.10
D 1.50	+0.10	
D	1.50	-0.00
D1	1.50	±0.10
Po	4.00	±0.10
10Po	40.00	±0.20

Operating & Storage Conditions 11.

11-1. Operating

- (1) Maximum Input Power: 2 W
- (2) Operating Temperature: -40°C to 85°C
- (3) Relative Humidity: 10% to 70%

11-2. Storage (sealed)

- (1) Storage Temperature: -5°C to 40°C
- (2) Relative Humidity: 20% to 70%
- (3) Shelf Life: 1 year

11-3. Storage (unsealed)

Meet the criteria of J-STD-033 MSL2a

11-4. Storage (After mounted on customer's PCB with SMT process)nictron Technologies Corp.

- (1) Storage Temperature: -40°C to 85°C
- (2) Relative Humidity: 10% to 70%

2019-04-18

REV.

D



詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT **PERMISSION**

Prepared by: Mina Checked by : Mike Designed by: Peter Approved by : Herbert

TITLE: 12.0 x 4.0 x 1.6 (mm) ISM 915 MHz Chip Antenna **DOCUMENT** H2U66J1K2C0100 (C912D5) Engineering Specification NO.

12. Notice

(1) Installation Guide:

Please refer to Unictron's application note "General guidelines for the installation of Unictron's chip antennas" for further information.

(2) All specifications are subject to change without notice.

Unictron Technologies Corp.

2019-04-18

Document Control Cent



詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by: Mina Designed by: Peter Checked by: Mike Approved by: Herbert

TITLE: 12.0 x 4.0 x 1.6 (mm) ISM 915 MHz Chip Antenna

(C912D5) Engineering Specification

DOCUMENT NO.

H2U66J1K2C0100