### 10.0 x 3.2 x 2.0 (mm) GNSS Chip Antenna (AA065A)

## **Engineering Specification**

#### **Product Number**

Н 2 6 V 2 0 0







#### 2. **Features**

- \*Stable and reliable in performances
- \*Low profile, compact size
- \*RoHS compliance
- \*SMT processes compatible

#### 3. **Applications**

- \*GNSS (Global Navigation Satellite System)
- \*Hand-held devices when GPS& BDS & GLONASS & GALILEO functions are needed, e.g., PDA, Smart phone, PND.

#### 4. **Description**

Unictron's AA065A chip antenna is designed for GNSS band applications, covering frequencies 1560~1606 MHz. Fabricated with proprietary design and processes, AA065A shows excellent performance and is fully compatible with SMT processes which can decrease the assembly cost and improve device's quality and consistency.

2019-04-16



#### 詠業科技股份有限公司

**Unictron Technologies Corporation** Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT **PERMISSION** 

Checked by: Mike Prepared by : Mina Designed by : Allen Approved by : Herbert

TITLE: 10.0 x 3.2 x 2.0 (mm) GNSS Chip Antenna (AA065A) Engineering specification

**DOCUMENT** NO.

H2UJ6V1A2A0100

REV. В


# 5. **Layout Guide & Electrical Specifications** 5-1. Layout Guide (unit: mm) Solder Land Pattern: The solder land pattern (gold marking areas) is shown below. Recommendation on matching circuit will be provided according to customer's installation conditions. **Grounding Pin** Signal Input Transmission Line with 50Ω Impedance Characteristic Top View <u>6.</u>4 Unictron Technologies Corp. **Bottom View** 2019-04-16 THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES 詠業科技股份有限公司 CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR **Unictron Technologies Corporation** SALE OF APPARATUS OR DEVICES WITHOUT Website:www.unictron.com PERMISSION Prepared by : Mina Designed by : Allen Checked by: Mike **Approved by : Herbert** TITLE: 10.0 x 3.2 x 2.0 (mm) GNSS Chip Antenna **DOCUMENT** REV. H2UJ6V1A2A0100 (AA065A) Engineering specification NO. В

# 5-2. Electrical Specifications (Evaluation Board Dimensions: 80 x 40 mm<sup>2</sup>) 5-2-1. Electrical Table

Characteristics	Specifications	
Outline Dimensions (mm)	10 x 3.2 x 2.0	
Working Frequency (MHz)	1560~1606	
Peak Gain (dBi) (typical) **	2.7	
Efficiency (%) (typical) **	75	
VSWR (@ center frequency)*	<2:1	
Characteristic Impedance ( $\Omega$ )	50	
Polarization	Linear Polarization	

<sup>\*</sup>Center frequency means the frequency with the lowest value in return loss of the chip antenna on the evaluation board.

#### 5-2-2. Frequency vs. V.S.W.R. and Total Radiation Gain

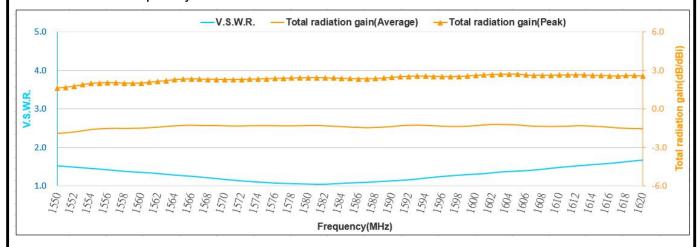

Unictron
Technologies Corp.

2019-04-16

Document

Unictron
Technologies Corp.

#### 詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


Prepared by: Mina Designed by: Allen Checked by: Mike Approved by: Herbert


TITLE: 10.0 x 3.2 x 2.0 (mm) GNSS Chip Antenna (AA065A) Engineering specification

DOCUMENT NO.

H2UJ6V1A2A0100


<sup>\*\*</sup>A typical value is for reference only, not guaranteed.

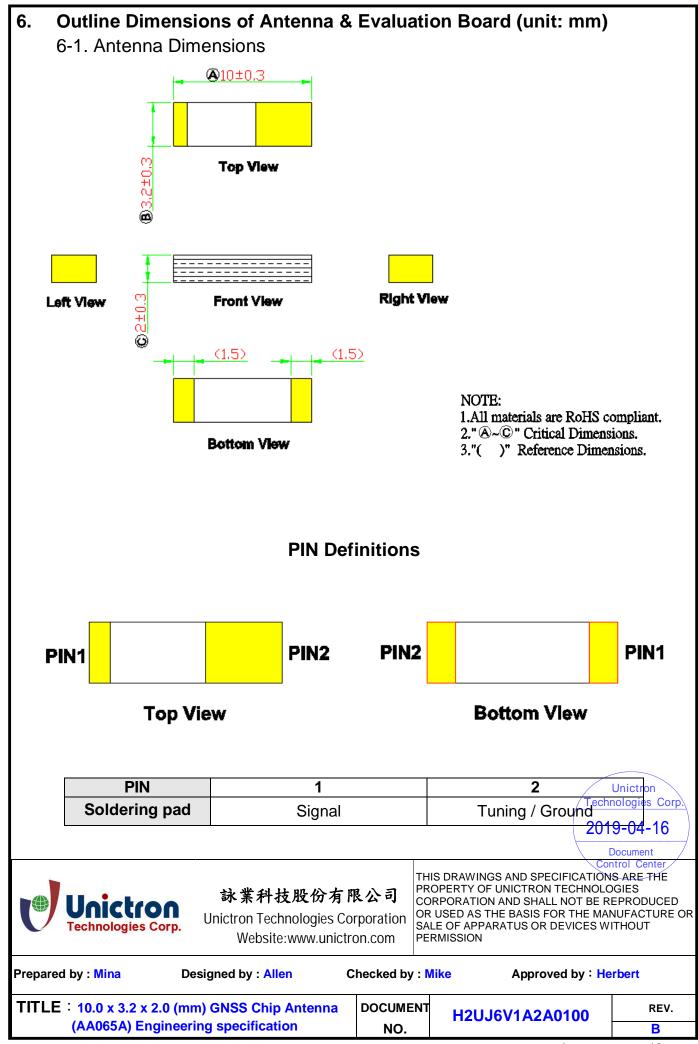


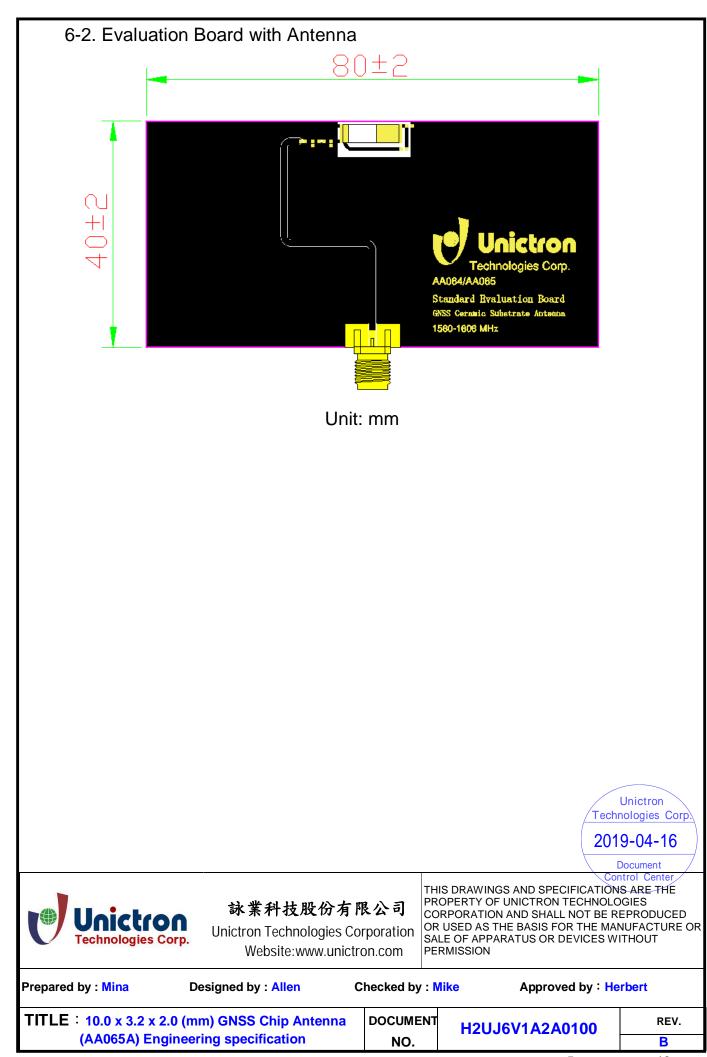



## 7. Radiation Pattern (with 80 x 40 mm<sup>2</sup> Evaluation Board)

7-1. 3D Gain Pattern @ 1561 MHz (Unit: dBi)

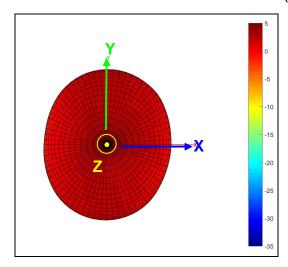

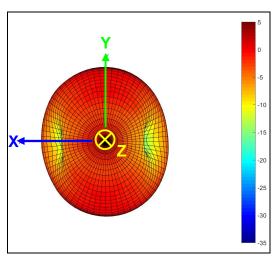

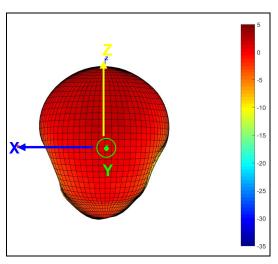

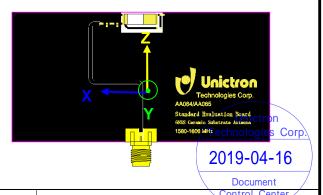



### 詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


Prepared by : Mina Designed by : Allen Checked by : Mike Approved by : Herbert


TITLE: 10.0 x 3.2 x 2.0 (mm) GNSS Chip Antenna (AA065A) Engineering specification


DOCUMENT NO.

H2UJ6V1A2A0100

#### 7-2. 3D Gain Pattern @ 1575.42 MHz (Unit: dBi)

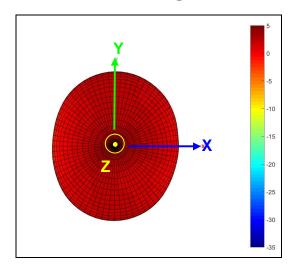

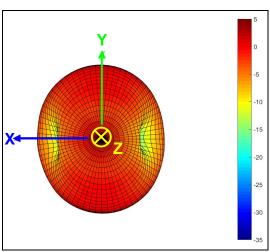

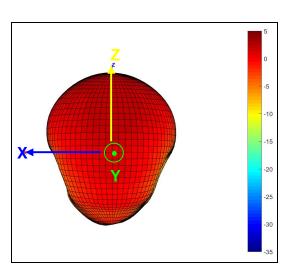



Unictron Technologies Corp.

#### 詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


Prepared by : Mina Designed by : Allen Checked by : Mike Approved by : Herbert


TITLE: 10.0 x 3.2 x 2.0 (mm) GNSS Chip Antenna (AA065A) Engineering specification


DOCUMENT NO.


H2UJ6V1A2A0100

#### 7-3. 3D Gain Pattern @ 1590 MHz (Unit: dBi)

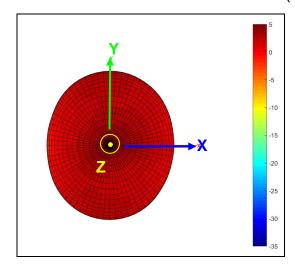

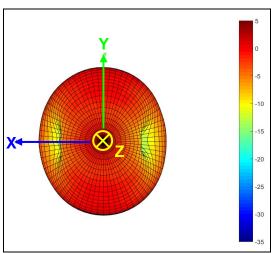

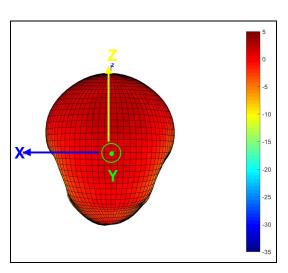

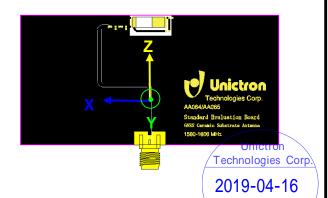

Unictron
Technologies Corp.

#### 詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Mina Designed by : Allen Checked by : Mike Approved by : Herbert

TITLE: 10.0 x 3.2 x 2.0 (mm) GNSS Chip Antenna (AA065A) Engineering specification


DOCUMENT NO.


H2UJ6V1A2A0100


REV.

**PAGE** 8 **OF** 13

#### 7-4. 3D Gain Pattern @ 1602 MHz (Unit: dBi)

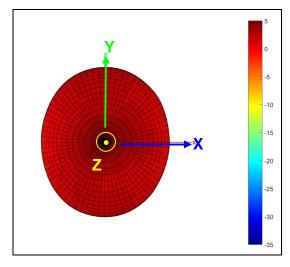

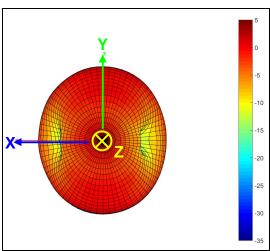

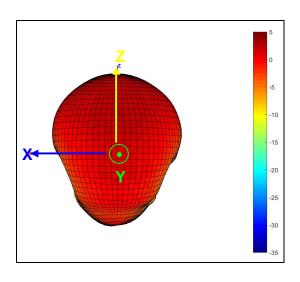



Document Control Cente



### 詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by : Mina Designed by : Allen Checked by : Mike Approved by : Herbert


TITLE: 10.0 x 3.2 x 2.0 (mm) GNSS Chip Antenna (AA065A) Engineering specification

DOCUMENT NO.

H2UJ6V1A2A0100


#### 8. Frequency tuning

#### 8-1. Chip antenna tuning scenario:

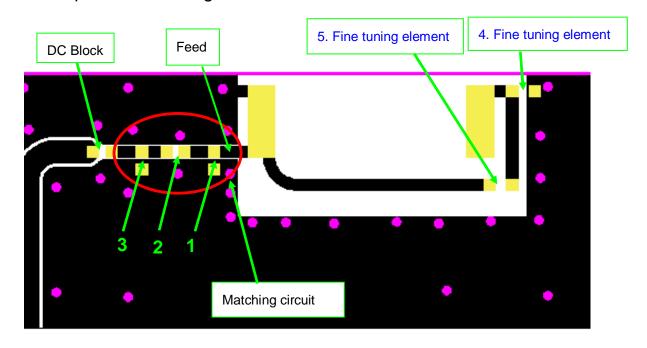

#### 8-2. Matching circuit:

Matching circuit: (Center frequency is about 1575.42MHz @ 80 x 40 mm<sup>2</sup> ground plane)

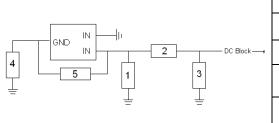

System Matching Circuit Component				
Location	Description	Vendor	Tolerance	
1	N/A*	N/A	N/A	
2	1.5nH*, 0402	MURATA	±0.3nH	
3	1.5pF*, 0402	MURATA	±0.05pF	
Fine tuning element 4	1.8 pF*, 0402	MURATA	±0.05pF	
Fine tuning element 5	0.7 pF*, 0402	MURATA	±0.05pF	
*Typical reference values which may need to be changed when circuit				

boards or part vendors are different.

2019-04-16

Document



#### 詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by: Mina Designed by: Allen Checked by: Mike Approved by: Herbert


TITLE: 10.0 x 3.2 x 2.0 (mm) GNSS Chip Antenna (AA065A) Engineering specification

DOCUMENT NO.

H2UJ6V1A2A0100

#### 9. Soldering Conditions

Typical Soldering Profile for Lead-free Process

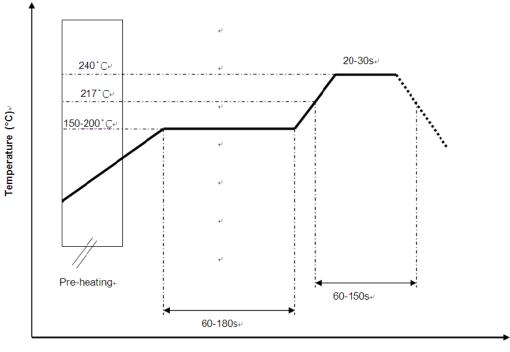

Time (s.)₽

Unictron
Technologies Corp.

2019-04-16

Document



### 詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by: Mina Designed by: Allen Checked by: Mike Approved by: Herbert

TITLE: 10.0 x 3.2 x 2.0 (mm) GNSS Chip Antenna (AA065A) Engineering specification

DOCUMENT NO.

H2UJ6V1A2A0100

REV.


**PAGE** 11 **OF** 13

<sup>\*</sup>Recommended solder paste alloy: SAC305 (Sn96.5 /Ag3 /Cu0.5) Lead Free solder paste

#### 10. Packing:

- (1) Quantity/Reel: 2000pcs/Reel
- (2) Plastic tape:

#### a. Tape Drawing

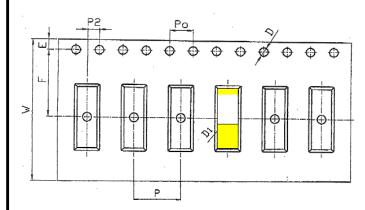

#### b. Tape Dimensions (unit: mm)

Feature	Specifications	Tolerances
W	24.00	±0.30
Р	8.00	±0.10
Е	1.75	±0.10
F	11.50	±0.10
P2	2.00	±0.10
D	1.50	+0.10
		-0.00
D1	1.50	±0.10
Po	4.00	±0.10
10Po	40.00	±0.20

#### 11. Operating & Storage Conditions

#### 11-1. Operating

- (1) Maximum Input Power: 2 W
- (2) Operating Temperature: -40°C to 85°C
- (3) Relative Humidity: 10% to 70%

#### 11-2. Storage (sealed)

- (1) Storage Temperature: -5°C to 40°C
- (2) Relative Humidity: 20% to 70%
- (3) Shelf Life: 1 year

#### 11-3. Storage (unsealed)

Meet the criteria of J-STD-033 MSL2a

#### 11-4. Storage (After mounted on customer's PCB with SMT process)

(1) Storage Temperature: -40°C to 85°C

(2) Relative Humidity: 10% to 70%

Unictron
Technologies Corp.

2019-04-16

Document



#### 詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by: Mina Designed by: Allen Checked by: Mike Approved by: Herbert

TITLE: 10.0 x 3.2 x 2.0 (mm) GNSS Chip Antenna (AA065A) Engineering specification

DOCUMENT NO.

H2UJ6V1A2A0100

# **12. Notice** (1) Installation Guide: Please refer to Unictron's application note "General guidelines for the installation of Unictron's chip antennas" for further information. (2) All specifications are subject to change without notice.

Unictron
Technologies Corp.

2019-04-16

Document Control Cent



### 詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

Prepared by: Mina Designed by: Allen Checked by: Mike Approved by: Herbert

TITLE: 10.0 x 3.2 x 2.0 (mm) GNSS Chip Antenna (AA065A) Engineering specification

DOCUMENT NO.

H2UJ6V1A2A0100

REV.

**PAGE** 13 **OF** 13